



• 단독형 Self-Contained Type 单独タイプ

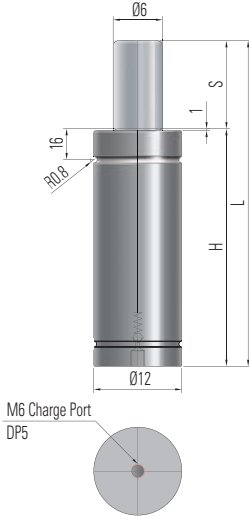


CODE	S (mm)	H (mm)	L (mm)	Volume (cm <sup>3</sup> )	Weight (kg)
PS45-07	7	49	56	0.7	0.03
PS45-10	10	52	62	0.9	0.03
PS45-13	12.7	54.7	67.4	1.1	0.03
PS45-15	15	57	72	1.3	0.03
PS45-19	19	61	80	1.6	0.04
PS45-25	25	67	92	2.1	0.04
PS45-38	38	80	118	3.1	0.04
PS45-50	50	92	142	4.0	0.05
PS45-64	63.5	108.5	172	5.2	0.06
PS45-75	75	120	195	6.1	0.07
PS45-80	80	125	205	6.5	0.07
PS45-100	100	145	245	8.0	0.08
PS45-125	125	170	295	10.0	0.09


• Force | Stroke ratio (180bar charging)

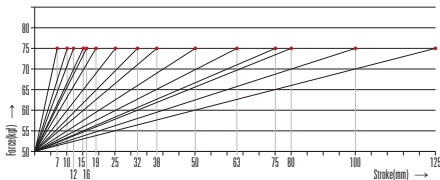

• Initial force | Charging pressure ratio

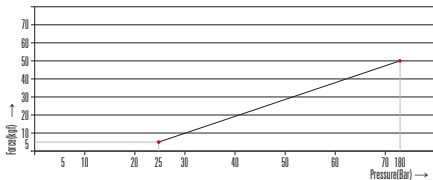

• 사용가능 마운트 Mounting Possibilities  
使用可能マウント (Page 13)

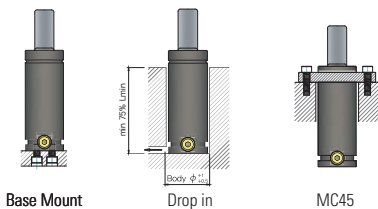

• 기본정보 Basic Information 基本情報

- Pressure Medium : Nitrogen gas
- Max. Charging Pressure : 180bar / 2610psi
- Min. Charging Pressure : 25bar / 360psi
- Operating Temperature : 0-80°C / 32- 176°F
- Force Increase by Temperature : 0.33%/°C
- Max. Rod Speed : 1.6m/s
- Piston Rod Area : 0.3cm<sup>2</sup>

• 주문방법 Ordering 注文方法

PS45 - 100 - MC - GR - QT04



# 45 Series Mount base



45 Series

